

RIPACK 2000 - 2200
NATURAL GAZ ADAPTATION KIT




Warning: adapting to natural gas reduces the heating capacity.


Be sure to set the network pressure: minimum 0.5 bar and maximum 3 bar. If the pressure is lower or higher, you need to use a system such as a booster to bring it up to the right pressure.

NATURAL GAS KIT - 2000 / 2200


Code	Pressure
240042	From 0,5 to 0,8 bar (40 kW)
240043	From 0,8 to 1,0 bar (40 kW)
240044	From 1,1 to 1,4 bar (40 kW)
240045	From 1,5 to 2,0 bar (40 kW)
240046	From 2,1 to 2,5 bar (40 kW)
240047	From 2,6 to 3,0 bar (40 kW)




12




17



19



If 0,4 bars < pressure < 1,4 bars
If 7 psi < pressure < 21 psi

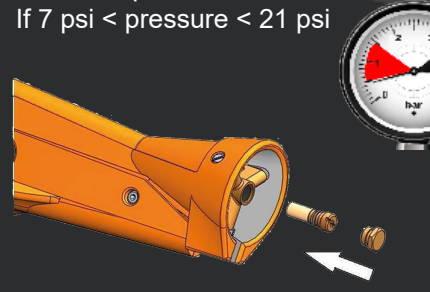

If 1,5 bars < pressure < 3,0 bars
If 22 psi < pressure < 44 psi

